

# Latitude Specification



## COMPOSITION

Construction	ISO2424	Tufted 1/10th Loop Pile
Pile Fibre	ISO2076	Alto Chroma 100% Solution Dyed Nylon
Primary Backing	ISO2424	Non-woven Polyester
Secondary Backing	ISO2424	Bitumen with glass fibre 3kg/m <sup>2</sup>
Pile Height	ISO1766	3.0 mm ± 0.5mm
Total Height	ISO1765	6.5 mm ± 0.5mm
Pile Weight	ISO1958	750 gr/m <sup>2</sup> ± 5%
Total Weight	ISO8543	4240 gr/m <sup>2</sup> ± 10%
Pile Density	ISO1763	103,000 tufts/m <sup>2</sup> ± 5%
Tile Size	EN994	50 x 50 cm
Tiles per Box		20 tiles per box (5m <sup>2</sup> )

## CLASSIFICATION

Flammability (Fire Spread EN13501)	ISO11925	Fs ≤ 150mm within 20 seconds
Flammability (Radiant Panel EN13501)	ISO9239	B <sub>fl</sub> -S1
Flammability (Hot Metal Nut)	BS4790	Low radius effects of ignition
Wear Resistance (Castor Chair Test)	ISO4918	Pass ≥ 2.4 (A – Continuous Use)
Electrical Vertical Resistance	ISO10965	Pass ≤ 10 <sup>9</sup> Ω
Electrostatic Propensity (Stroll Test)	ISO6356	Pass < 2.0kV
Slip Resistance	EN13893	DS
Dimensional Stability	EN986	Pass < 0.2%
Acoustic Impact Noise Reduction	ISO10140-1	22dB
Sound Absorption	ISO354	500Hz-0.06as, 1000Hz-0.18as, 2000Hz-0.27as, 4000Hz-0.34as
Colour Fastness – Light (CIELAB)	ISO105	≥ 6
Colour Fastness – Rubbing (CIELAB)	ISO105	≥ 5
Colour Fastness – Water (CIELAB)	ISO105	≥ 5
Classification for Use	ISO10874	Class 33 Commercial Heavy
Luxury Class Rating	EN1307	LC1


## ENVIRONMENTAL

Formaldehyde Emission HCHO - E1  
BREEAM A Rating


## WARRANTY

10 Year Wear Warranty

## CERTIFICATION

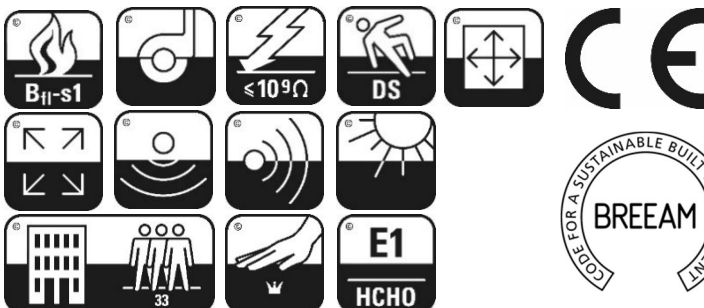

## INSTALLATION



© The Floor Hub. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available on request.

The Floor Hub HQ & Trade Bar, No 3, 14 Greycaine Road, Watford, Herts. WD24 7GP  
The Floor Hub Showroom, The Vault, 8-11 St John's Lane, Clerkenwell, London. EC1M 4BF  
Tel: 01923 211151 Email: hello@thefloorhub.co.uk  
www.thefloorhub.co.uk