

# Skyscape Specification



## COMPOSITION

Construction	ISO2424	Tufted 1/10th Loop Pile
Pile Fibre	ISO2076	100% Polypropylene
Primary Backing	ISO2424	PA/PES non-woven
Secondary Backing	ISO2424	Polyflex with non-woven fabric
Pile Height	ISO1766	2.9 mm ± 0.5mm
Total Height	ISO1765	5.9 mm ± 0.5mm
Pile Weight	ISO1958	400 gr/m <sup>2</sup> ± 5%
Total Weight	ISO8543	3700 gr/m <sup>2</sup> ± 10%
Tile Size	EN994	50 x 50 cm
Tiles per Box		20 tiles per box (5m <sup>2</sup> )


## CLASSIFICATION

Flammability (Fire Spread EN13501)	ISO11925	Fs ≤ 150mm within 20 seconds
Flammability (Radiant Panel EN13501)	ISO9239	C <sub>fi</sub> -S1
Flammability (Hot Metal Nut)	BS4790	Low radius effects of ignition
Wear Resistance (Castor Chair Test)	ISO4918	Mat protectors recommended
Electrical Vertical Resistance	ISO10965	Pass ≤ 10 <sup>9</sup> Ω
Electrostatic Propensity (Stroll Test)	ISO6356	Pass <2.0kV
Slip Resistance	EN13893	DS
Dimensional Stability	EN986	Pass <0.2%
Colour Fastness – Light (CIELAB)	ISO105	4.4
Colour Fastness – Rubbing (CIELAB)	ISO105	5
Colour Fastness – Water (CIELAB)	ISO105	5
Classification for Use	ISO10874	Class 31 Commercial Moderate
Luxury Class Rating	EN1307	LC1

## WARRANTY


5 Year Wear Warranty

## CERTIFICATION

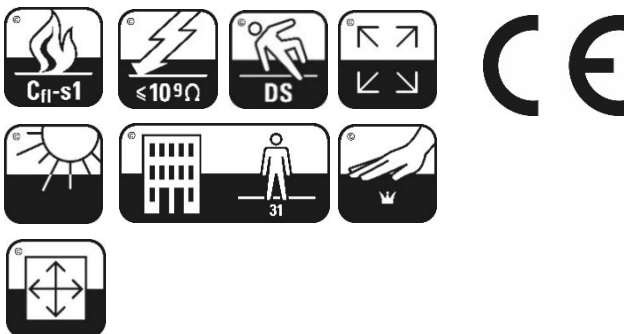


## INSTALLATION

### Plain Tiles



MONOLITHIC    QUARTER TURN

### Striped Tiles



BRICK    QUARTER TURN

© The Floor Hub. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available on request.

The Floor Hub HQ & Trade Bar, No 3, 14 Greycaine Road, Watford, Herts. WD24 7GP  
 The Floor Hub Showroom, The Vault, 8-11 St John's Lane, Clerkenwell, London. EC1M 4BF  
 Tel: 01923 211151 Email: hello@thefloorhub.co.uk  
 www.thefloorhub.co.uk